

Universal Modem-to-Antenna Adaptor

Product code: A-ADPT-026



This device couples to the modem internal antenna signal and diverts it to a booster antenna thereby ensuring better signal reception and ultimately better data throughput.

The coupler is slid over the modem (see photos). You then connect the other end of coupler to one of our booster antennas via the SMA (female) connector. The booster antenna can be mounted on the outside of the building and pointed toward your closest cellular base station to ensure good reception.

Features:

- Works with most USB and express card Modems

- Lightweight

- Robust

Application:

- Connecting any cellular modem to a high gain antenna for improved range and data throughput.

Specifications:

Product Code:
A-ADPT-026

0.5m RG174 with SMA type (f) connector

Electrical:

Frequency
VSWR
Coupling Loss (min over band)
Coupling Loss (max over band)
Nominal input impedance

700-1000 and 1700-2800 MHz
< 6:1 (coupled)
4 dB
7 dB
50 Ohm

Mechanical:

Dimensions (l x w x t)
Weight
Mounting


45 mm x 36 x 22 mm
20 g
Slide over modem

Environmental:



Temperature Range
Shock
Thermal Shock

- 20° C to +70° C
40G at 10 msec
-20° C to +70° C: 10 cycles

Measured VSWR

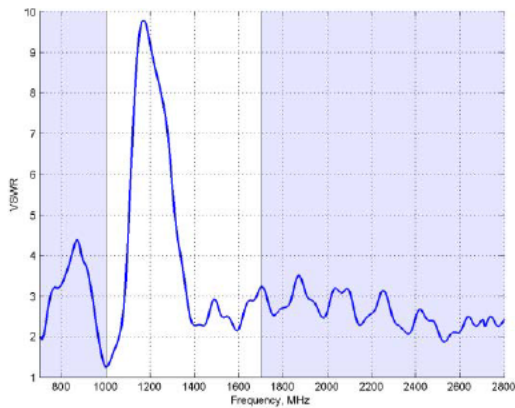

VSWR (coupled)

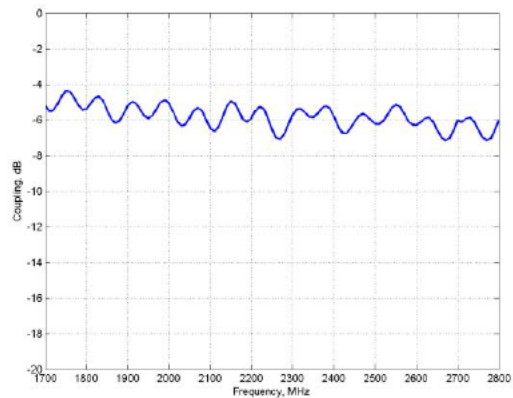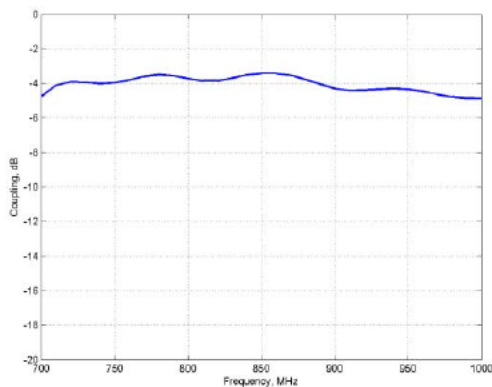

Coupling to internal modem antenna