
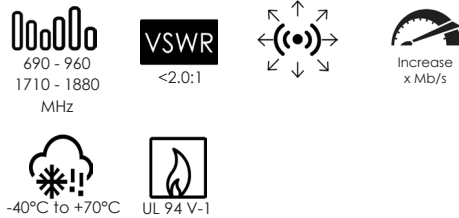
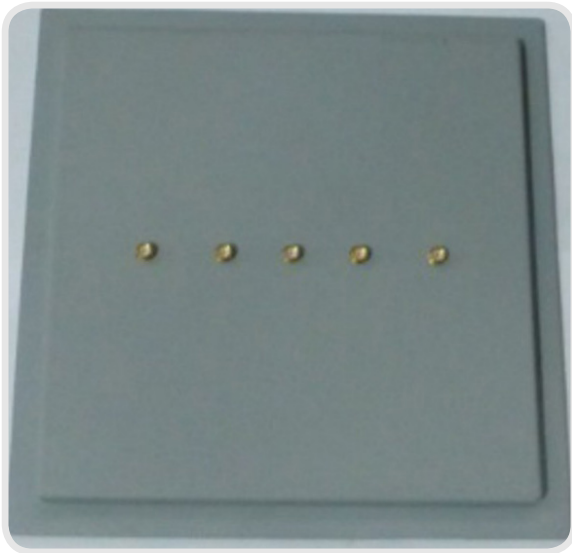


ANTENNAS | SPLT-13**SPLT-13**

690 - 960, 1710 - 1880 MHZ GSM 4-WAY SPLITTER

**Product Overview**

This product is capable of accepting a signal at it's input and dividing it into 4 signals whose power is a quarter of the original.

Features


- Full GSM frequencies
- Low loss splitter
- Good phase and amplitude balance


Application areas

- Least Cost Routers (LCRs)
- Splitting power from a single antenna to four independent devices

Frequency bands


The SPLT-13 is a wide-band antenna that works from 690 - 960 MHz & 1710 - 1880 MHz

 Indicates the bands on which this antenna works

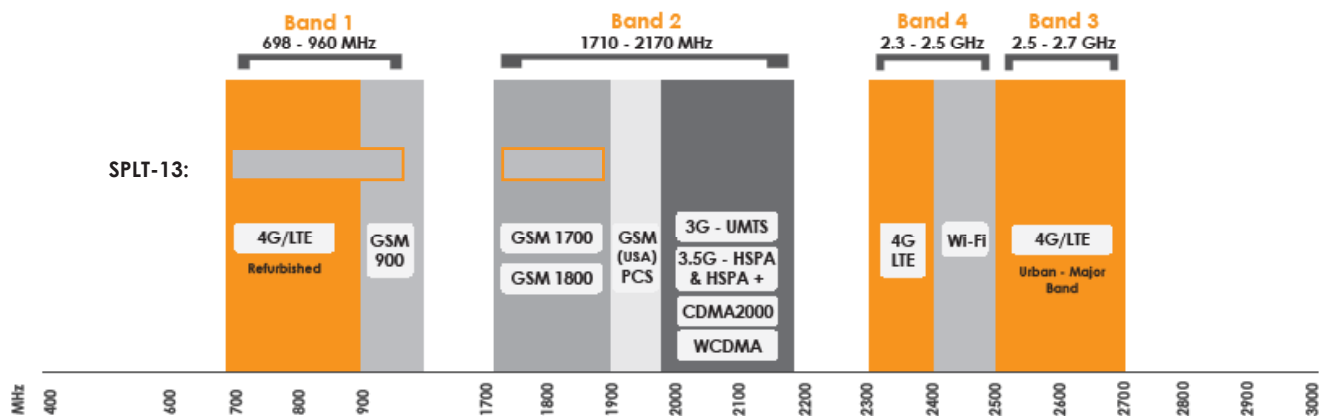


Splitter Performance Plots


INPUT PORT VSWR:

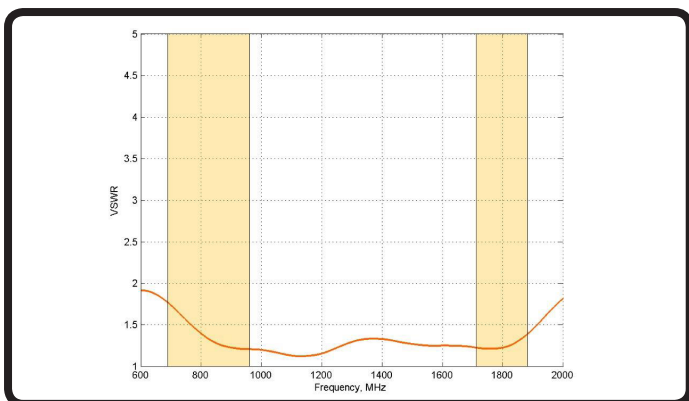


OUTPUT PORT VSWR:

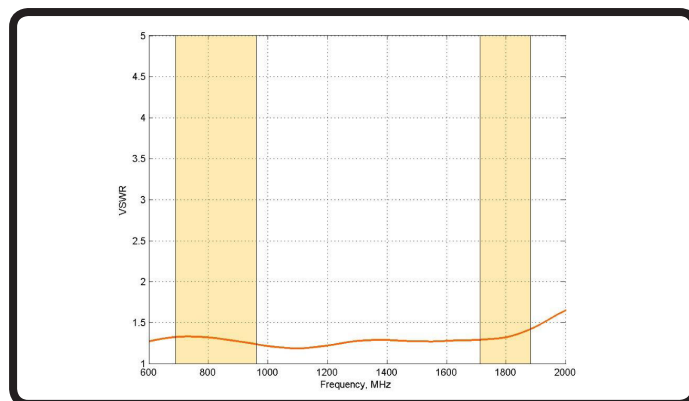

ISOLATION:

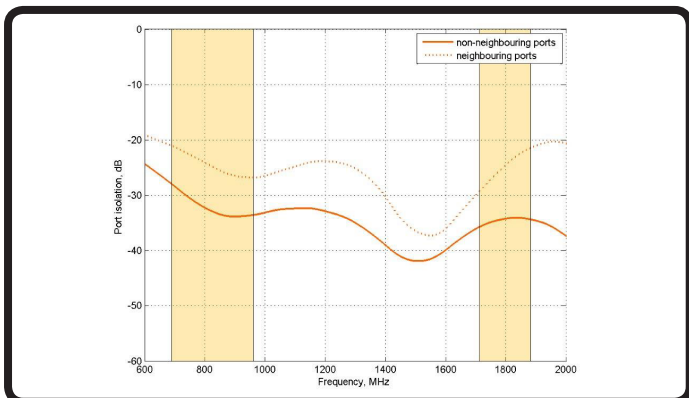

INSERTION LOSS:

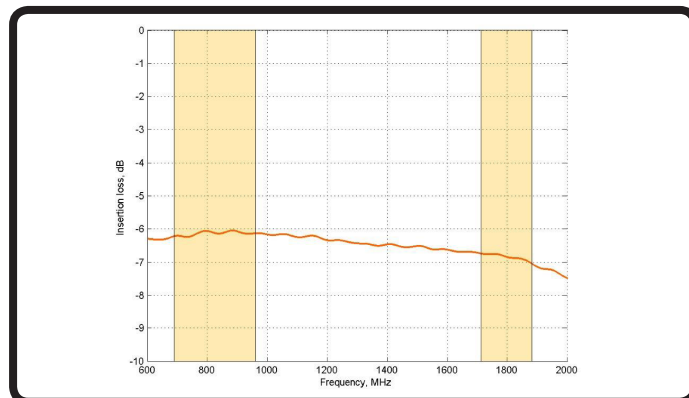

Electrical Specifications

Frequency Bands:	690 - 960 MHz 1710 - 1880 MHz
VSWR (Input port):	<2.0:1
VSWR (Output port):	<2.0:1
Isolation:	>20dB
Phase imbalance:	< 2
Amplitude imbalance:	0.2 dB
Insertion loss (excluding splitting loss):	< 1.5 dB
Insertion loss (including splitting loss):	< 7.5 dB

Mechanical Specifications

Product Dimensions (L x W x D):	150 mm x 165 mm x 20 mm
Packaged Dimensions:	Aerothene packaging
Weight:	140g
Packaged Weight:	148g
Random Material:	ABS
Random Colour in Pantone:	Grey
Random Colour in RAL:	Grey

Environmental Specifications

Temperature Range (Operating):	-40°C to +70°C
Environmental Conditions:	Indoor
Operating Relative Humidity:	Up to 98%
Storage Humidity:	5% to 95% - non condensing
Storage Temperature:	-40°C to +70°C

Product Box Contents

Antenna:	A-SPLT-0013
Connector (s):	5x SMA (f)

Ordering Information

Commercial name:	SPLT-13
Order Product Code:	A-SPLT-0013
EAN number:	6009693810679

Additional Accessories Available

Extension Cables:	None
-------------------	------

Certification Approvals and Standards

Flammability rating:	UL 94-V1 EN 13823
Impact resistance:	IK 05
Salt Spray:	MIL-STD 810F/ASTM B117
Product Safety:	Complies with UL, CE, EN, CSA and IEC standards

For more detailed information and availability in your region,
visit our web site: www.poynting.tech



Contact Poynting

Poynting Antennas (Pty) Ltd - Head Office

Unit 4, N1 Industrial Park
Landmarks Avenue,
Samrand, 0157
South Africa

Phone: +27 (0) 12 657 0050

E-mail: sales@poynting.co.za

Poynting Europe

Regus Business Center Neue Messe Riem
Kronstadter Straße 4
81677 München
Germany

Phone: +49 89 208026538

E-mail: sales-europe@poynting.tech

SPLT-13

©2015 Poynting Antennas (Pty) Ltd. All rights reserved.
Product Specifications may change without prior notice
Revised: October 2015

Regulatory Compliance: RoHS 2011/65/EU Compliant | ISO 9001:2008
Document version: TS-A-SPLT-0013_V1.2
www.poynting.tech